

DX kozijn opdek model 03 Vierkant Luxe S 55 mm



Deurbladmaat			Deurmaat			Kozijnsponingmaat		Kozijnmaat		Wandopening				Vrije Doorgang		Kozijn bekledingsmaat	
h1	b1a	b1b	h0	b0a	b0b	h6	b6	h5	b5	h3 min	h3 max	b3 min	b3 max	h7	b7	h2	b2
						h1-5	b1a+b1b-29	h1+6	b1a+b1b-7	h1+16	h1+41	b1a+b1b+13	b1a+b1b+63	h1-16	b1a+b1b-51	h1+50	b1a+b1b+81
2015	656	656	2002	643	643	2010	1283	2021	1305	2031	2056	1325	1375	1999	1261	2065	1393
2015	706	706	2002	694	694	2010	1383	2021	1405	2031	2056	1425	1475	1999	1361	2065	1493
2015	756	756	2002	742	742	2010	1483	2021	1505	2031	2056	1525	1575	1999	1461	2065	1593
2015	806	806	2002	806	806	2010	1583	2021	1605	2031	2056	1625	1675	1999	1561	2065	1693
2015	856	856	2002	843	843	2010	1683	2021	1705	2031	2056	1725	1775	1999	1661	2065	1793
2015	906	906	2002	906	906	2010	1783	2021	1805	2031	2056	1825	1875	1999	1761	2065	1893
2015	956	956	2002	944	944	2010	1883	2021	1905	2031	2056	1925	1975	1999	1861	2065	1993

* Draainaden links /rechts : 3,5 mm
* Draainaad boven : 4 mm
* Ruimte onder de deur: 4 mm

Wandopening h3=h1 + 21
b3=b1a + b1b + 23

Vrije doorgang h7=h1- 16
b7=b1a + b1b - 51

Kozijnbekledingsmaat h2=h1+ 50
b2=b1a + b1b + 81

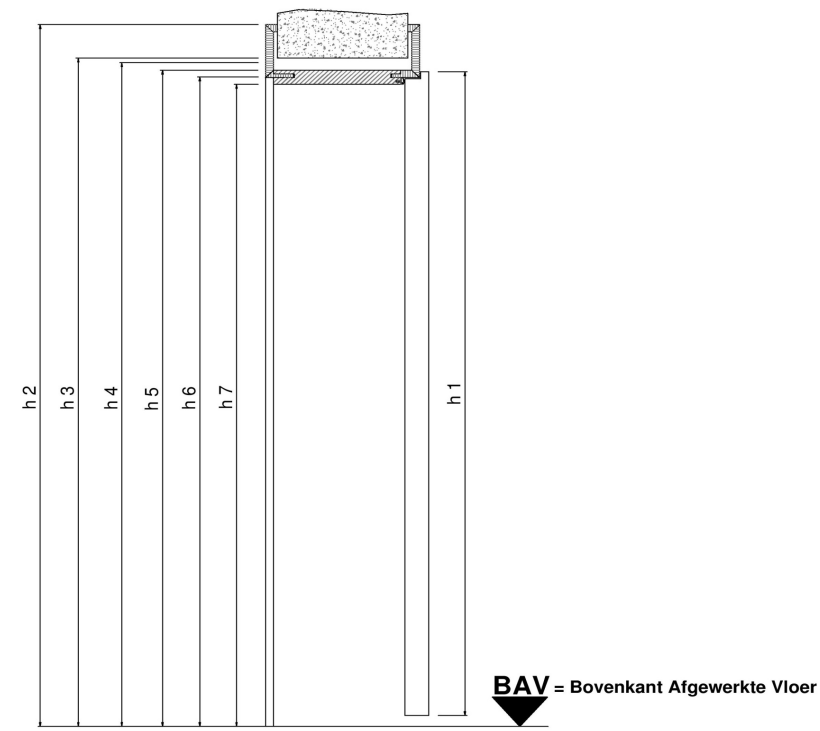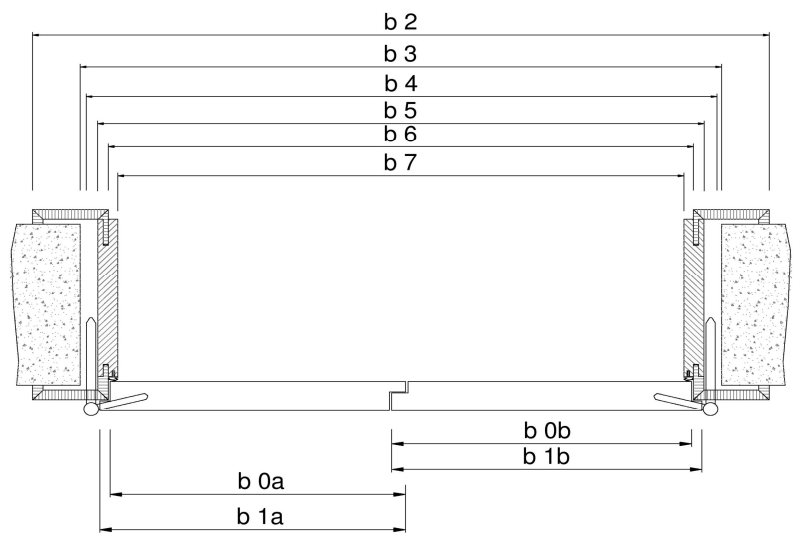

BAV = Bovenkant Afgewerkte Vloer